

RCP23 Plug-in socket receiver PULSE

The RCP23 plug-in socket receiver receives transmission codes from programmed Easywave radio transmitters and triggers an 1-second pulse on the connected device via the pulse output. The pulse can also be triggered via a button on the RCP23.

With the RCP23, it is therefore very easy to retrofit or convert garage door motors with a radio interface.

The RCP23 also comes with a power outlet which is not switched and thus remains fully usable.




RCP23EK5001A01-K

Technical specifications

Coding	Easywave Up to 32 transmitters can be programmed.
Frequency	868.30 MHz
Channels	1
Power supply	230 VAC, 50 Hz
Power consumption	0.4 W standby
Operating mode	PULSE (1 second)
Outputs	1 potential free 24 V relay contact 1 protective contact plug (D/A/NL/S/N)
Maximum contact load	pulse output: 1 A / 24 V DC mains output (not switchable): 16 A / 230 VAC
Operating temperature	-10 °C to +35 °C
Dimensions	71.4 x 71.4 x 75.5 mm
Color	white similar to RAL 9003

Plug system




D/A/NL/S/N

Scope of delivery

- Plug-in socket receiver
- Cable (length 150 cm)
- Operating manual

Wiring diagram

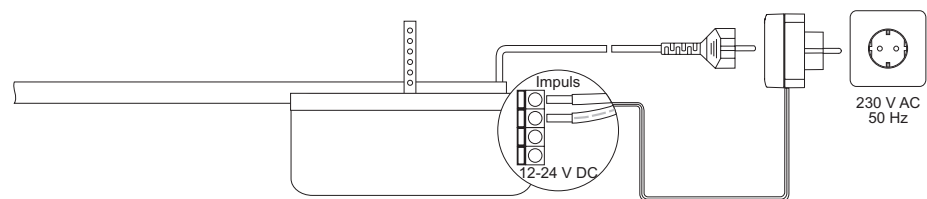

Models

Product numbers	Description	Plug system
RCP23EK5001A01-K	Plug-in socket receiver 1-channel, pulse, white	D/A/NL/S/N