

RCL09 Mini-receiver

The wireless controller RCL09 has two potential-free relay contacts which can be activated by ELDAT secwave transmitters.

The RCL09 is operated at 12-24 V AC/DC, and up to 100 secwave transmitters per channel can be paired.

With regard to technical features, the RCL09 is identical to the RCL08, but the housing is dustproof and waterproof.




RCL09S5002A01-01K

Technical specifications

Coding	secwave, AES 128-bit encryption Up to 100 transmitters per channel can be programmed. Not compatible with Easywave products!
Frequency	868.30 MHz
Channels	2
Power supply	12-24 V AC/DC
Power consumption	0.4 W standby at 24 V DC 0.8 W standby at 24 V AC
Operating modes	ON/OFF (1-button operation) PULSE (1 second)
Outputs	2 potential-free relay contacts (changeover contacts)
Maximum contact load	
- AC	24 V / 1 A / 24 VA
- DC	30 V / 1 A / 30 W
Degree of protection	IP65
Operating temperature	-20 °C to +60 °C
Dimensions	72 x 114 x 36 mm
Color	white similar to RAL 9003

Wiring diagram

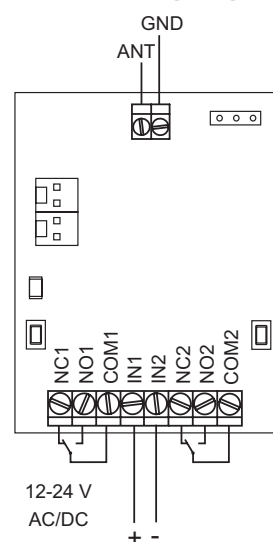

Scope of delivery

- Mini-receiver
- Adhesive pad
- Operating manual

Accessories (optional)

RCL03-ACC-01-00P	2x cable assembly length 45 cm
ACC-ANT50-03-21P	868.30 MHz external antenna cable length 5 m



RCL03-ACC-01-00P



ACC-ANT50-03-21P

Models

Product numbers	Description
RCL09S5002A01-01K	Mini-receiver secwave 868 MHz 2-channel, white 12-24 V AC/DC changeover contact, IP65